

Cluster introduction

Azat Khuziyakhmetov

Gesellschaft für wissenschaftliche Datenverarbeitung mbH Göttingen


Burckhardtweg 4, 37077 Göttingen

Phone: +49 551 39-30000 gwdg@gwdg.de www.gwdg.de

03.04.2024

Section 1

Hardware overview

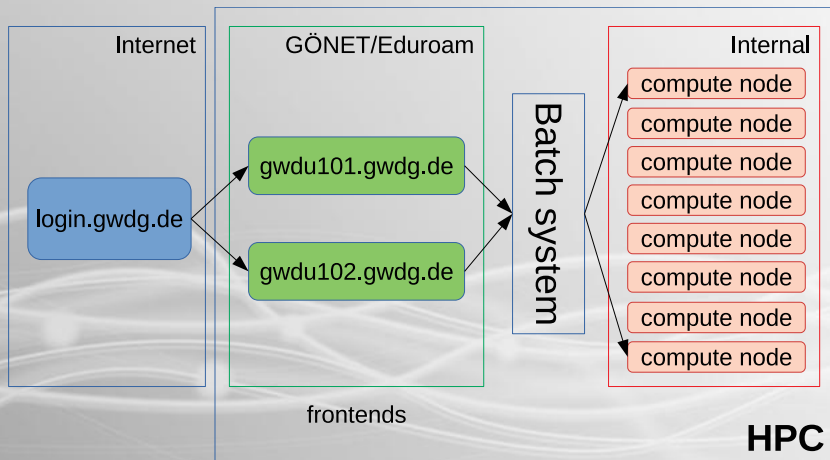

Two sites:

- Modular Data Center (MDC)
 - Frontends: login-mdc.hpc.gwdg.de (gwdu101 and gwdu102)
 - Nodes: agqXXX, agtXXX, ampXXX
 - Intel Cascade Lake
- RZGö
 - Frontend: no dedicated login node
 - Nodes: dfaXXX, dmpXXX, dgeXXX, dteXXX
 - Intel Broadwell

2 filesystems

- ① HOME filesystem
- ② SCRATCH filesystem

HOME

- Stores your *permanent* data.
- There is a quota. It could be extended on request.
- Has a backup mechanism.

SCRATCH

- Stores your data used for computations or projects.
- Fast and large filesystem.
- No quota, but also no backup.

HOME

- Quota is set per user basis.
- Quota command displays current limits

```
gwdu101:14 11:55:41 ~ > Quota
```

```
Global Filesystem KBytes: used softlimit hardlimit ...
UNI11                370216          0          0
UNI05                65316256 104857600 419430400
```

SCRATCH

- No quota per user. However, storage is limited.

```
gwdu101:45 10:52:46 ~ > df -h /scratch
```

```
Filesystem      Size  Used Avail Use% Mounted on
beegfs_nodev    2.1P  1.6P  462T  78% /scratch1
```

- **local** filesystem is NOT shared, but fast (SSDs).
- Use it for temporal data on every node
- The size of it rather small

```
bash-4.2$ df -h /local
```

Filesystem	Size	Used	Avail	Use%	Mounted on
/dev/sda6	78G	57M	74G	1%	/local

- Location is in the variable `TMP_LOCAL`

```
bash-4.2$ echo $TMP_LOCAL  
/local/jobs/15287707/
```

Archive location

- Personal archive is located at `/usr/users/a/USERNAME`
- You can get the path from `$AHOME` variable

Usage

- It is necessary to compress directories as tar or zip files
- if you want to archive directory data, call

```
tar -czvf $AHOME/data.tgz data
```

or faster (uses 4 cores and faster compression)

```
PIGZ="-1 -p 4 -R" tar -I pigz -cvf $AHOME/data.tgz data
```


- connect to the frontends
- check your HOME quota
- check out the scratch file system. How big are they, how much space is currently available?
- You downloaded a large genome database (100GB) from NCBI. Where would you store it and why?
- use scratch and archive:
 - Create a project directory on scratch
 - Add some files in it (e.g. `date > file1.txt`)
 - Compress the folder and send to archive

Time: 10 minutes

Important

The Scratch filesystem is **NOT** a permanent storage

Recommended workflow

- Create directory for your project
/scratch/users/\$USER/PROJECT
- Copy all necessary data there
- Run your compute jobs
- After completion of your jobs, save important results, that you need for further work to your home directory
- Delete all temporary files and broken runs
- Move the rest of the directory, that you want to keep for reference, into the archive and delete it from Scratch

```
tar -czvf $AHOME/PRJ.tar.xz /scratch/users/$USER/PROJECT
rm -rf /scratch/users/$USER/PROJECT
```

There are 2 transfer servers that can be used to transfer data from your machine to HPC.

transfer.gwdg.de

- reachable from the Internet
- only HOME is mounted

transfer-scc.gwdg.de (new name transfer-mdc.hpc.gwdg.de)

- reachable only from GÖNET
- HOME and /scratch are available

SCP

works on Linux, macOS, and latest Windows

```
scp -rp {SRC-DIR} {USER}@transfer.gwdg.de:{DST-DIR}
```

to transfer back, simply swap the arguments

```
scp -rp {USER}@transfer.gwdg.de:{SRC-DIR} {DST-DIR}
```

Filezilla

works on all platforms. GUI. Open source software.

Rsync

works on Linux, macOS

```
rsync -avvH {SRC-DIR} {USER}@transfer.gwdg.de:{DST-DIR}
```

to transfer back, simply swap the arguments

```
rsync -avvH {USER}@transfer.gwdg.de:{SRC-DIR} {DST-DIR}
```

Section 2

Modules and Containers

Problem:

- HPC Systems have a complex software ecosystem
 - ➔ different versions needed
 - ➔ complicated compiler requirements
 - ➔ library dependencies
- Package manager (yum, apt, etc.) cannot satisfy these requirements
- Compilation can be complicated

Solution:

- We compile/install software as necessary
- Make the software available with “modules”

- “module avail” find a list of installed modules
- “module list” list of currently loaded modules
- “module load software/version”
- “module purge” unload all modules
- “module unload software” unload a single module
- Most of the modules just append or prepend a path to PATH and MANPATH variables.
- Or set default variables to be found by compiler/configure scripts at compile time.

- Software provided as modules are compiled for specific CPU architecture: Cascadelake or Haswell.
- Names of these modules are the same, the correct version is loaded depending on the node you(your jobs) are.
- If you compile your software for specific architecture, check the modules you are using with `module whatis` command. It contains the "Target".

```
> gwdu103 ~ > module whatis gromacs
> ...
> gromacs/2020.4      : Target : haswell
> gwdu101 ~ > module whatis gromacs
> ...
> gromacs/2020.4      : Target : cascadelake
```


Singularity is the containerization system, just like Docker.
However, we don't provide Docker in HPC for security reasons.

Usage

To load singularity use the modules

```
module load singularity
```

You can run either native Singularity or Docker images.

```
singularity run library://sylabscd/examples/lolcow
```

With Docker image

```
singularity run docker://godlovedc/lolcow
```

Some software packages provide Docker or Singularity images, if they do it will be easier to run them as containers.

- Have a look at the available modules.
 - Load a module and see how your environment changes.
 - Log in and log out again. Are the modules still loaded?
- Run a Singularity container.

Time: 5 Minutes

Section 3

Compiling Software

Why Compiling?



- Compiling means to create an executable – or a library – from the source code
- GWWDG cannot install all software required by users (see modules for what is available)
- Scientific software is often only available as source code
- Compiling on the target system often yields better performance
- Prepackaged software typically requires administrator (root) privileges ...

Using wget and tar to prepare the source code

```
> mkdir $HOME/build  
> cd $HOME/build  
> wget <tarball URL>  
> tar xvzf <name-version>.tar.gz  
> cd <name-version>
```

- Standard method: “./configure; make; [make check; make install]”
- Without root privileges: “--prefix” at configuration

About “--prefix”



- “--prefix” is used to specify the base directory for your software
- use “./configure --prefix=DIR” to install directly in DIR.
- e.g. “./configure --prefix=\$HOME/software/<name-version>” to install into a software specific directory.

Building and installing software into a specific directory

```
> cd $HOME; mkdir software
> cd $HOME/build/<name-version>
> ./configure --prefix=$HOME/software/<name-version>
> make -j 4; make check
> make install
> ln -s $HOME/software/<name-version>/bin/* $HOME/bin
> ln -s $HOME/software/<name-version>/lib/* $HOME/lib
> ln -s $HOME/software/<name-version>/include/* $HOME/include
```


- The GNU compilers (`gcc`, `gfortran`) are the standard compilers in Linux
- Other compilers are often faster, especially for Fortran code
- Recommended for overall performance: Intel compilers (`icc`, `ifort`)

Building and installing software with Intel compilers

```
> module load intel
> CC=icc; CXX=icpc; FC=ifort; F77=ifort; F90=ifort
> export CC CXX FC F77 F90
> ./configure --prefix=$HOME/software/<name-version>
> make -j 4; make check
> make install
```

- A (shared) library is a collection of thematically related subroutines ready to use in a program
- The process of connecting a library to the (compiled) program is called linking
- Intel's Math Kernel Library provides performance optimized linear algebra and Fourier transform functions

Example: linking programs to MKL

```
> module load intel
> CC=icc; CXX=icpc; FC=ifort; F77=ifort; F90=ifort
> export CC CXX FC F77 F90
> module load intel-parallel-studio
> export CPPFLAGS="-I${MKLROOT}/include -I${MKLROOT}/include/fftw"
> export LDFLAGS="-L${MKLROOT}/lib/intel64 -lmkl_intel_lp64\
> -lmkl_sequential -lmkl_core -lpthread -lm"
> ./configure --prefix=$HOME/software/<name-version>
> make -j 4; make check
> make install
```

Use Intel MKL Link Line Advisor!

<https://software.intel.com/en-us/articles/intel-mkl-link-line-advisor>

Exercises: Compile your own editor!



In this exercise, you will download and compile the latest version of the nano editor

- Download the latest version of nano using `wget` or `curl`
- extract it using `tar`
- create a build directory
- configure the software with a prefix
- compile and install it
- test it!

Time: 10 Minutes